


# ZEISS Products

Nature Observation 2017 / 2018



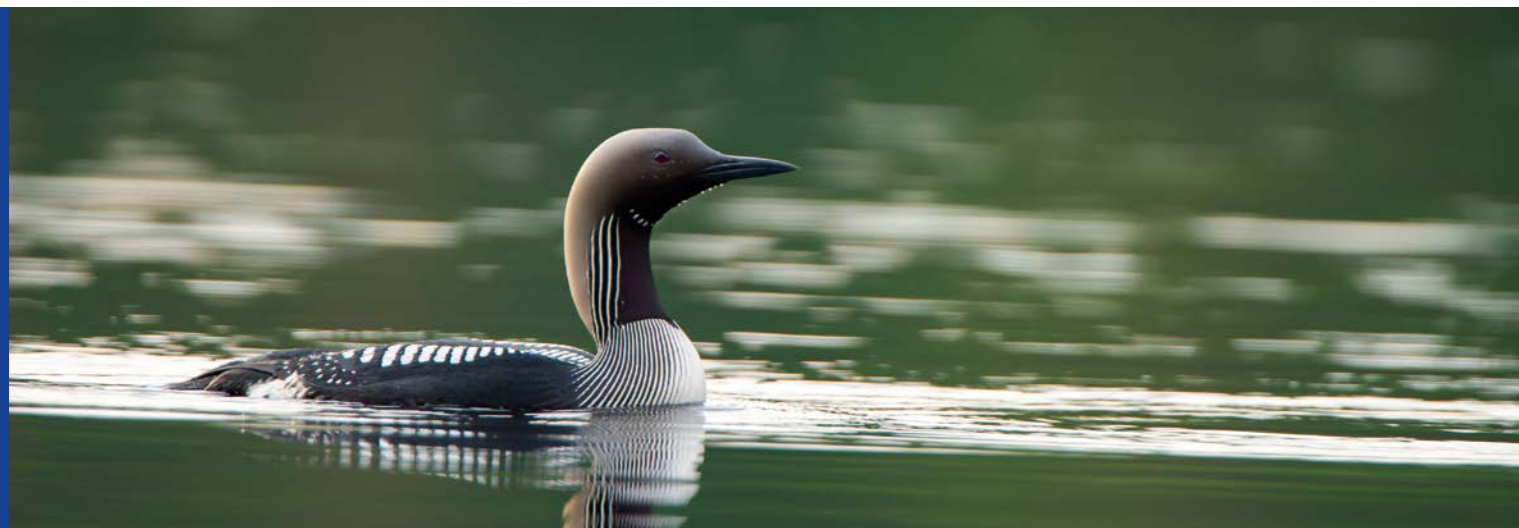

## Content

## Binoculars and Spotting Scopes

**VICTORY**

Leading-edge optics from ZEISS.

SF Binoculars	6
HT Binoculars	8
Pocket	10
Rangefinder	13
Harpia Spotting Scopes	16

**CONQUEST**

The powerful mid-range from ZEISS.

HD Binoculars	20
Gavia Spotting Scope	22

**TERRA**

The entry class from ZEISS.

ED Binoculars	26
---------------	----

**SPECIALS**

Monos	28
20×60 S	29
Night Vision	29

**ACCESSORIES**

Accessories for Binoculars	30
Accessories for spotting scopes	31
ExoLens – Smartphone Adaptor	33
Cleaning Material	34





# Victory

The leading-edge optics



# ZEISS Victory SF

The most versatile premium binoculars from ZEISS

## More robust

Stable, ergonomic design: TripleLink Bridge.

Highest-quality workmanship and the latest materials: Made in Germany.

## Faster

Focus at varying distances quickly and intuitively: SmartFocus Concept.

Precise operation and natural grip in ideal hand position: anti-slip focusing wheel.

## Closer

Discover every detail with the close range of 1.5 meter.

## Sharper

Natural colour rendition and brilliant details: Ultra-FL system.

## More brilliant

Bright, high-contrast images for long observations into the twilight: impressive 92% transmission.

Experience even the finest details: fluoride glass from SCHOTT.

## More Portable

Feather-light design and ultra-light magnesium materials.

## More ergonomic

Revolutionary handling for fatigue-free observation over many hours.

Innovative ErgoBalance Concept with centre of gravity near the eyepiece.

## Wider

Unparalleled wide field of view in its class: 148m at 1,000m (Victory SF 8×42).

Extreme sharpness up to the edges combined with an extra wide field of view.



# ZEISS Victory HT

The brightest binoculars from ZEISS



## More robust

The use of extremely solid, superlight magnesium guarantees maximum service life.

## More ergonomic

Maximum ergonomic convenience even when you wear gloves – all thanks to the ComfortFocus Concept featuring a large focusing wheel.

## Clearer

Clear vision in any weather. Rain and dirt are simply expelled thanks to the proven LotuTec® coating.

## Brighter

SCHOTT HT glass, ZEISS T\* multilayer coating and the Abbe-König prism system deliver bright, high-contrast images.

## More elegant

The elegant design marks the continuation of the Dialyt design – timeless and functional.

## More brilliant

The ZEISS Victory HT is not only bright, but also brilliant thanks to the integration of fluoride glass (FL) which enhances imaging performance. Not a single detail will be missed – at day or twilight.

# ZEISS Victory Pocket

The most compact premium binoculars from ZEISS

**New!**

**Leightweight**

Especially convenient thanks to low weight and asymmetrical folding.



**More brilliant**

Large field of view and fluoride glass (FL) for extraordinary sharp and detailed pictures.

**More advanced**

Design, mechanics and ruggedness for highest demands.



The new Victory Pocket promise high performance in all kinds of outdoor applications. Despite their amazingly light-weight construction, their high magnification and FL-lenses with ZEISS T\* multi-layer coating help them to deliver brilliant image quality. The asymmetrical folding makes it particularly compact. The LotuTec® coating that ensures that water drips right off them and dirt can be removed without a trace.



Victory binoculars	Pocket	
Model	8×25	10×25
Magnification	8×	10×
Effective lens diameter	25 mm	25 mm
Exit pupil diameter	3.1 mm	2.5 mm
Twilight factor	14.1	15.8
Field of view at 1,000 m	130 m	105 m
Subjective viewing angle	60°	
Close focus	1.9 m	
Diopter adjustment range	± 3 dpt	
Exit pupil distance	16.5 mm	
Pupil distance	34-74 mm	
Lens type	FL	
Prism system	Schmidt-Pechan	
LotuTec® / Nitrogen filled	yes/yes	
Water resistance	100 mbar	
Operating temperature	-25 / +63 °C	
Length	112 mm	
Width at an interpupillary distance of 65mm	100 mm	
Weight	290 g	
Order number	52 2038-9901	52 2039-9901



# ZEISS Victory binoculars

## Best visual experience

ZEISS Victory binoculars combine unrivaled optical sophistication and image quality with the most innovative, comfortable and lightweight ergonomic design for a user experience that's beyond compare.



### SF 8/10×42

- Tremendous optical performance
- Unparalleled wide field of view: 148 m at 1,000 m (SF 8×42)
- Perfect ergonomics: SmartFocus Concept



### HT 8/10×42

- SCHOTT High Transmission Glass for max. brightness
- Bright and clear images
- ComfortFocus Concept



### FL 8/10×32

- FL glass produces superb images with neutral color rendition
- Amazing low-light performance
- Wide field of view



### RF 8/10×45

- "One touch" operation
- Ballistic-Information-System (BIS®)
- Measures distance up to 1,200 m



### Pocket 8/10×25

- Exceptionally compact and robust
- Excellent optical performance
- Modern and ergonomic design



### HT 8/10×54

- Maximum low light performance
- Large exit pupil
- Up to 95% light transmission



### PRF 8×26

- LED display
- Lightweight and compact
- Ballistic-Information-System (BIS®)



### RF 8/10×56

- Best low light performance with 56 mm objectives
- "One touch" operation
- Ballistic-Information-System (BIS®)

# ZEISS Victory binoculars

## Specifications

Victory binoculars Model	SF		HT				FL	
	8×42	10×42	8×42	10×42	8×54	10×54	8×32	10×32
Magnification	8×	10×	8×	10×	8×	10×	8×	10×
Effective lens diameter	42 mm		42 mm		54 mm		32 mm	
Exit pupil diameter	5,3 mm	4,2 mm	5,3 mm	4,2 mm	6,7 mm	5,4 mm	4 mm	3,2 mm
Twilight factor	18,3	20,5	18,3	20,5	20,7	23,2	16	17,9
Field of view at 1,000 m	148 m	120 m	136 m	110 m	130 m	110 m	140 m	120 m
Subjective viewing angle	64° Ww		62° Ww	63° Ww	60° Ww	63° Ww	64° Ww	69° Ww
Close focusing distance	1,5 m		1,9 m		3,5 m		2 m	
Diopter adjustment range	± 4 dpt.		± 4 dpt.		± 3 dpt.		± 4 dpt.	
Exit pupil distance	18 mm		16 mm		16 mm		15,5 mm	15,2 mm
Interpupillary distance (PD)	55–76 mm		54–76 mm		58–76 mm		52–74 mm	
Objective type	Ultra-FL		FL/HT-Typ				FL	
Prism system	Schmidt-Pechan		Abbe-König				Schmidt-Pechan	
Coating	LotuTec® / T*		LotuTec® / T*				LotuTec® / T*	
Nitrogen filled	yes		yes				yes	
Water resistance	400 mbar		500 mbar				400 mbar	
Operating temperature	-30 / +63°C		-30 / + 63 °C				-30 / + 63 °C	
Length	173 mm		167 mm		193 mm		117 mm	
Width at an interpupillary distance of 65 mm	125 mm		128 mm		142 mm		116 mm	
Weight	780 g		830 g	850 g	1035 g	1050 g	550 g	560 g
Order number	52 42 23	52 42 24	52 45 28	52 45 29	52 56 28	52 56 29	52 32 30	52 32 31

Victory Rangefinder Model	PRF	RF		RF	
	8 × 26 PRF	8 × 45 RF	10 × 45 RF	8 × 56 RF	10 × 56 RF
Magnification	8×	8×	10×	8×	10×
Lens diameter	26 mm	45 mm		56 mm	
Exit pupil diameter	3,25 mm	5,6 mm	4,5 mm	7 mm	5,6 mm
Twilight factor	14,4	19	21,2	21,2	23,7
Field of view at 1,000 m	110 m	125 m	Ww 110 m	115 m	Ww 110 m
Close focus	-	ca. 5,5 m		ca. 5 m	
Diopter adjustment range	± 3,5 dpt	± 3,5 dpt		± 3,5 dpt	
Eye relief	17,5 mm	16 mm	15,5 mm	17 mm	16 mm
Pupil distance		54 - 76 mm		57 - 76 mm	
Lens type	2-lens Achromat	4-lens Achromat		4-lens Achromat	
Prism system	Roof	Abbe-König		Abbe-König	
LotuTec®	yes	yes		yes	
Nitrogen filling	-	yes		yes	
Water resistance	100 mbar	400 mbar		400 mbar	
Length x Height x Width	approx. 130 × 98 mm	approx. 167 × 135 mm		approx. 194 × 139 mm	
Weight (with battery)	approx. 310 g	approx. 995 g		approx. 1,150 g	
Laser class	class 1 M	class 1		class 1	
Laser wavelength	904 nm	904 nm		904 nm	
Measuring range / Range*	10 - 1.200 m	10 - 1.200 m		10 - 1.200 m	
Measuring accuracy	± 1 m to 600 m ± 0,5% over 600 m	± 1 m to 600 m ± 0,5% over 600 m		± 1 m to 600 m ± 0,5% over 600 m	
Measuring duration	max. approx. 1,5 sec	max. approx. 0,5 sec		max. approx. 0,5 sec	
Laser beam divergence	4,0 × 2,0 mrad	1,6 × 0,5 mrad		1,6 × 0,5 mrad	
Battery	1 × 3V Type CR 2	1 × 3V Type CR 2		1 × 3V Type CR 2	
Battery life at +20°C	> 2.000 Measurements	> 10.000 Measurements		> 10.000 Measurements	
Order number	52 45 61	52 45 16	52 45 18	52 56 20	52 56 22

\* The range is influenced by the size and degree of reflection of the object as well as by the weather conditions. Including cordura pouch, neoprene carrying strap, eyepiece and lens covers.



# ZEISS Victory Harpia

The highest performance spotting scope from ZEISS

**New!**



**LotuTec® coating**

Clear view in any weather. Neither rain nor dirt stick.

**Elaborate lens system**

FL glass and other custom glass ensures an absolutely sharp and colour fidelity image even at maximum magnification.

**Extremely large wide angle field of vision**

Subjective 72° angle of vision over the entire zoom range for a noticeably greater overview of the terrain.

**DualSpeed focus**

Precise focussing with automatic switching between rapid and fine adjustment.

**Compact high performance eyepiece**

The slim shape ensures comfortable viewing. Safely lockable with bayonet catch.



**Harpia Stay-On case**

The Stay-On case for the Victory Harpia was designed for reliable protection, optimum carrying comfort and, above all, quick operational readiness of the spotting scope. Both – eyepiece- and lens covers – can be securely fastened to the case.

Observing nature and bird watching reaches a new level with the ZEISS Victory Harpia. This spotting scope combines an extraordinary optics system with a large lens diameter of up to 95 mm and a 3-stage wide angle zoom with up to 70x magnification.

Extremely wide field of view gives the impression of seeing unobstructed into open space. The maximum sharpness and DualSpeed focus of the lens is impressive in every situation, in all temperatures and in all weather conditions.

Victory Spotting Scope	Harpia	
Model	85	95
Focal length of lens	162 mm – 486 mm	174 mm – 523 mm
Filter thread objective lens side	M86x1	M95x1
Lens diameter	85 mm	95 mm
Close focus	3,5 m	4,5 m
Height x Width x Length	121 x 103 x 384 mm	124 x 109 x 408 mm
Weight without eyepiece	1.934 g	2.078 g
Waterproof	400 mbar	
Nitrogen filling	yes	
Order number	52 80 47	52 80 57

	Eyepiece	
Maginification	22–65x	23–70x
Focal length	7,48 mm	
Field of view m/ 1000 m	63,2–21,0	58,8–19,5
Zoomfactor	3x	
Exit pupil	2,50–1,31 mm	2,50–1,34 mm
Diameter	Ø 53 mm	
Length	71 mm	
Weight	220 g	
Order number	52 80 70	

Including eyepiece- and lens cover. All with ZEISS T\*-multi-layer-coating.





# Conquest

The powerful  
mid-range from ZEISS



# ZEISS Conquest HD

## Optical excellence for your success

Nature never stops. And neither does ZEISS. This becomes especially true with the Conquest binoculars. A revolution in design, ergonomics and optics. These versatile, Made in Germany binoculars combine traditional ZEISS quality with state-of-the-art technology.

### Nature in HD

Maximum detail and colour rendition – experience the optics that set standards with the HD lens system.

### The perfect balance

Outstanding ergonomics thanks to compact dimensions, low weight and a modern design.

### Light in the darkness

90% transmission and more provides an ideal foundation for impressive observations in the twilight.



### Clarity

Less cleaning and more vision is the key to success of the LotuTec® lens coating from ZEISS.

### Don't miss a thing

Extra-wide fields of view ensure relaxed observation and an excellent overview.

### Made in Germany

The uncompromising doorway to the ZEISS premium class.



### HD 8/10×32

- Compact and lightweight – perfect ergonomics
- HD lens system
- Fast and precise focusing – even with gloves on



### HD 8/10×42

- All purpose binoculars
- HD lens system
- Designed and engineered in Germany



### HD 8/10/15×56

- Extreme low light specialist
- HD lens system
- Tripod adapter with 15× model

### Conquest binoculars

Model	HD						
	8×32	10×32	8×42	10×42	8×56	10×56	15×56
Magnification	8×	10×	8×	10×	8×	10×	15×
Effective lens diameter	32 mm	32 mm	42 mm	42 mm	56 mm	56 mm	56 mm
Exit pupil diameter	4 mm	3.2 mm	5.25 mm	4.2 mm	7 mm	5.6 mm	3.7 mm
Twilight factor	16	17.9	18.3	20.5	21.2	23.7	29.0
Field of view at 1,000 m	140 m	118 m	128 m	115 m	125 m	115 m	80 m
Subjective viewing angle	64° Ww	68° Ww	59°	66° Ww	57°	66° Ww	69° Ww
Close focus	1.5 m		2 m		3.5 m		
Diopter adjustment range	± 4 dpt		± 4 dpt		± 4 dpt		
Exit pupil distance	16 mm		18 mm		18 mm		
Pupil distance	54–74 mm		54–74 mm		54–74 mm		
Lens type	HD		HD		HD		
Prism system	Schmidt-Pechan		Schmidt-Pechan		Abbe-König		
Coating	LotuTec® / T*		LotuTec® / T*		LotuTec® / T*		
Nitrogen filled	yes		yes		yes		
Water resistance	400 mbar		400 mbar		400 mbar		
Functional temperature	-20 / +63 °C		-20 / +63 °C		-20 / +63 °C		
Length	132 mm		150 mm		210 mm		
Width at an interpupillary distance of 65 mm	118 mm		120 mm		145 mm		
Weight	630 g	630 g	795 g	795 g	1,265 g	1,275 g	1,295 g
Order number	52 32 11	52 32 12	52 42 11	52 42 12	52 56 31	52 56 32	52 56 33



# ZEISS Conquest Gavia 85

## A compact companion for great discoveries

Thanks to impressive precision, low weight and a robust design, the ZEISS Conquest Gavia is a companion you'll always want when making discoveries off the beaten path. To observe the natural world without causing a disruption, you need the right equipment: the new Conquest Gavia 85 spotting scope from ZEISS is the ideal travel companion thanks to its compact design and low weight, so you can capture all the wonders of nature from just the right angle. The high-resolution lens system and rapid focus transform the

shots into unforgettable images. Whether you're taking photos of individual birds or entire flocks, the 60x magnification of the Conquest Gavia 85 enables nature observers to enjoy nature to the max, ensuring that no detail goes unnoticed. The universal tripod plate is compatible with a range of tripods. The new ZEISS Conquest Gavia provides birdwatchers and nature observers with a high-performance spotting scope that is simply great value. Extensive digiscoping accessories go one step further in expanding the wide range of uses.



**Ergonomic**

Large focusing wheel for more precise handling.

**More details**

HD lens system for bright and brilliant images.

**Brilliant**

Roof prism system with high optical precision.

**Light**

Magnesium housing and compact dimensions.

**ExoLens® Bracket**

Observing, capturing, sharing – used in conjunction with the suitable spotting scope adapter, the new ExoLens bracket easily connects smartphones with the spotting scope to be used as a camera for digiscoping.



**Carrying case**

The carrying case for the Conquest Gavia was designed for reliable protection, optimum carrying comfort and, above all, quick operational readiness of the spotting scope. Both – eyepiece- and lens covers – can be securely fastened to the case.



Conquest spotting scope	Gavia 85
Magnification	30–60x
Lens diameter	85 mm
Exit pupil diameter	2.8 mm–1.4 mm
Focal length	494 mm
Field of view at 1,000 m	33 m – 23 m
Close focus	3.3 m
Lens type	HD
LotuTec®/Nitrogen filling	yes/yes
Water resistance	400 mbar
Lens thread	M 86x1
Length	396 mm
Weight (incl. eyepiece)	1,700 g approx.
Order number (incl. eyepiece 30–60x85)	52 80 48

Including eyepiece- and lens cover.





# Terra

The entry class from ZEISS



# ZEISS Terra ED

## The entry class

Experience the legendary ZEISS quality in a form focused on the essentials: ease of use, sturdiness and optical performance.

### Ergonomic

The large, smooth and easy-to-grip focus wheel makes it fast and easy to bring into focus.



### Compact, light and robust

With a fiberglass reinforced, water-tight body, ZEISS Terra ED is built to withstand the toughest conditions.

### Proven

SCHOTT ED glass with a hydrophobic multi-coating provides optical clarity and precision in all situations.



### ED Pocket 8/10×25

- Extremely compact
- Outstanding images
- Functional handling



### ED 8/10×32

- Impressive images
- Smooth, exact focusing
- Lightweight and compact

### ED 8/10×42

- Bright and crisp images
- Excellent handling
- Optimal visual comfort

Terra binoculars Modell	ED					
	8×25	10×25	8×32	10×32	8×42	10×42
Magnification	8×	10×	8×	10×	8×	10×
Effective lens diameter	25 mm		32 mm		42 mm	
Exit pupil diameter	3.1 mm	2.5 mm	4.0 mm	3.2 mm	5.3 mm	4.2 mm
Twilight factor	14.1	15.8	16.0	17.9	18.3	20.5
Field of view at 1,000 m	119 m	97 m	135 m	112 m	125 m	110 m
Subjective angle of view	52°	54°	60°	63°	56°	60°
Close-up setting limit	1,9 m		1,5 m		1,6 m	
Diopter adjustment range	± 3 dpt		± 4 dpt		± 4 dpt	
Exit pupil distance	16.0 mm		16.5 mm		18 mm	14 mm
Pupil distance	35–72 mm		56–74 mm		57.5–76 mm	
Lens type	ED		ED		ED	
Prism system	Schmidt-Pechan		Schmidt-Pechan		Schmidt-Pechan	
Coating	Hydrophobic ZEISS MC		Hydrophobic ZEISS MC		Hydrophobic ZEISS MC	
Nitrogen filled	yes		yes		yes	
Water resistance	100 mbar		100 mbar		100 mbar	
Operating temperature	-20/+63° C		-15/+60° C		-15/+60° C	
Length	111 mm		125 mm		142 mm	
Width with an eye spacing of 65 mm	115 mm		111 mm		120 mm	
Weight	310 g		510 g		725 g	
Order number	black / green		52 32 03-99 08	52 32 04-99 08	52 42 03-99 08	52 42 04-99 08
	black / black		52 32 03-99 01	52 32 04-99 01	52 42 03-99 01	52 42 04-99 01
	grey / grey	52 25 02-99 07	52 25 03-99 07	52 32 03-99 07	52 32 04-99 07	52 42 03-99 07

Subject to changes in design and scope of delivery as a result of ongoing technical development. For more information, please go to [www.zeiss.com/sports-optics](http://www.zeiss.com/sports-optics)



# ZEISS Monos

## Magnification in miniature format



The 3×12 is a powerful mini-monocular with triple magnification. It can turn Victory\* and Conquest binoculars with a lens diameter of 30 mm into a high performance spotting scope in the blink of an eye. The Mono can be quickly fixed onto the eyepiece using an adapter ring. On its own it can serve as a magnifying glass at close range.

\* not SF

For highly detailed observation at long range for sporting events, theatrical performances, or in the great outdoors: The monos with their ZEISS T\* multi-layer coating provide bright, clear images and, depending on the model, can also be used as a magnifying glass.

Model	Monos					
	3×12	4×12	6×18	8×20	10×25	MiniQuick® 5×10
Magnification	3×	4×	6×	8×	10×	5×
Lens diameter	12 mm		18 mm	20 mm	25 mm	10 mm
Exit pupil diameter	4 mm	3 mm		2.5 mm		2 mm
Twilight factor	6	6.9	10.4	12.6	15.8	7
Field of view at 1,000 m	220 m	180 m	120 m	110 m	88 m	100 m
Subjective viewing angle	38°	41°		51°		29°
Close focus	0.2 m	0.25 m	0.3 m	3 m	4.5 m	4 m
Diopter adjustment range	± 4 dpt					
Eye relief	12 mm	15 mm				16.5 mm
Lens type	Achromat					
Prism system	Schmidt-Pechan					–
Water resistance	splash proof					
Functional temperature range	-20 / +40 °C					
Height × Width	58 mm	70 mm	94 mm	101 mm	119 mm	113 mm
Weight	54 g	45 g	58 g	67 g	77 g	23 g
Order number	52 20 12	52 20 50	52 20 51	52 20 52	52 20 53	52 20 10

All with ZEISS T\*-multi-layer coating.

# ZEISS 20×60 S

## With image stabilisation

A superlative binocular, designed to cope with long range observation, is also used on the International Space Station (ISS). The low light Porro prism system delivers the most brilliant images even at 20× magnification, complete with outstanding detailed resolution. The crowning glory of the 20×60 S is the technically unique mechanical image stabilisation system. The unavoidable tremble found in freehand observation can be “switched off” at the touch of a button.



Victory	Binoculars with image stabilisation
Model	20×60 S
Magnification	20 ×
Lens diameter	60 mm
Exit pupil diameter	3 mm
Twilight factor	34.6
Field of view at 1,000 m	Ww 52 m
Subjective viewing angle	60°
Close focus	14 m
Diopter adjustment range	± 7 dpt
Eye relief	13 mm
Pupil distance	57-73 mm
Lens type	Achromat
Prism system	Porro
Water resistance	splash proof
Functional temperature range	-20 / +40 °C
Height × Width	275 × 161 mm
Weight	1,660 g
Order number	52 60 00

Delivery incl. neoprene carrying strap, eyepiece cover and aluminium case

# ZEISS Night Vision

## An optic that turns night into day



The high performance, compact night vision monocular is the ideal companion for night observations. Ready to use at the touch of a button, the low light 62 mm lens with 5.6× magnification can be focussed manually. All available light is bundled onto a highly sensitive photocathode (Generation 2+) and intensified to produce a razor-sharp, high contrast image with high resolution.

Victory	Night Vision
Model	5.6×62 NV
Magnification	5.6 ×
Lens diameter	62 mm
Field of view at 1,000 m	142 m
Close focus	5 m
Diopter adjustment range	± 4 dpt
Eye relief	20 mm
LotuTec®	yes
Nitrogen filling	yes
Length × Height × Width	233 × 100 × 80 mm
Weight	approx. 1.000 g
Reticle: Distance between lines	0.5 m / 100 m
Measuring range	500 m
Order number	52 30 07 - 9901

Delivery including cordura pouch, carrying strap, eyepiece- and lens covers and 2 × AA batteries.



# Accessories

## For binoculars

Tripod adaptor	Order-Nr.
Binofix universal tripod mount for all binocular models	52 83 87
Tripod adaptor 1/4" for Conquest HD (included in HD 15x56 delivery)	52 83 88

Magnification attachment Mono 3x12	Order-Nr.
Including carrying strap and leather pouch; triples normal binocular magnification	52 20 12

Adaptor for magnification attachment for	Order-Nr.
Victory FL/RF/HT (not SF) and Conquest HD 32+42	52 83 77
Conquest HD 56	52 83 79
Dialyt 8x56 GA	52 83 83

Accessories for Victory NV 5.6x62	Order-Nr.
SLR camera adaptor (see picture)	52 30 06 - 9007
1"-flashlight mount	52 30 06 - 9006
Min Maglite adaptor	52 30 06 - 9008

Pouches for	Order-Nr.
Victory SF	2060-069
Terra Pocket	2157-510
Leather pouch for 20x60 S	52 90 83

Cordura bags for	Order-Nr.
Victory HT 42	1980-766
Victory HT 54	2074-447
Conquest HD 32 and Terra ED 32	52 90 35
Conquest HD 42 and Terra ED 42	1976-008
Conquest HD 56	1379-711

Carrying straps	Order-Nr.
Air Cell comfort straps	52 91 13
Binocular comfort straps	52 91 15



Binofix universal tripod mount



Tripod adaptor 1/4"



Magnification attachment Mono 3x12



Adaptor for magnification attachment



SLR camera adaptor



Pouch for Victory SF



Cordura bag



Pouch for Terra Pocket



Air Cell comfort straps



Bino comfort straps

# Accessories

## For spotting scopes

The carbon tripods provide utmost stability and flexibility. They can be combined with all ZEISS spotting scopes and most binoculars.



### Tripod Light

Thanks to a quick-change plate the Tripod Light is ready to use in seconds. The compact size and the low weight make the Tripod Light the ideal travel companion. The ZEISS Tripod Light is perfectly suitable for our Conquest products and for travel activities.



### Tripod Professional

The Tripod Professional head allows for particularly soft panning and tilting, featuring a precise and safe clamping mechanism. The ZEISS Tripod Professional is perfectly suitable for our Victory products and for Digiscoping.

### Long Balance Plate

Our Long Balance Plate is the ideal solution to perfectly balance your spotting scope, especially when engaging in digiscoping.



Model	Tripods		Long balance plate
	Light	Professional	
Material	Carbon		for model Professional only
Length closed	ca. 665 mm	ca. 700 mm	
Length open	ca. 1,820 mm	ca. 1,820 mm	
Weight	ca. 2,038 g	ca. 2,460 g	
Order number	21 69-973	21 69-972	





**Photo lens adaptor for Gavia 85**

Whether you are observing, filming or taking photographs, the photo lens adaptor (M49, M52, M58) enables you to directly connect the Conquest Gavia 85 to your digital camera, thereby transforming the spotting scope into a powerful telephoto lens.

Adaptor		Order-Nr.
Astro Adaptor	Gavia	52 83 45-0000
Photoadaptor M49	Gavia	52 83 48-9901
	Harpia	52 83 57-9901
Photoadaptor M52	Gavia	52 83 48-9902
	Harpia	52 83 57-9902
Photoadaptor M58	Gavia	52 83 48-9903
	Harpia	52 83 57-9903



Photoadaptor for Conquest Gavia



Astro adapter 1.25" to connect Conquest Gavia to standard astro eyepieces



Carrying case for Gavia

Stay-On case for Harpia



Astro adaptor for		Order-Nr.
DiaScope		52 83 82

# ExoLens

With the ExoLens Bracket and the suitable adaptor, you can connect a smartphone to your spotting scope or binoculars to use it as a camera for digiscoping.

ExoLens Bracket for	Order-Nr.
Apple iPhone 6 / 6s	21 86-887
Apple iPhone 7	22 16-613
Samsung Galaxy S6 / S6 edge	21 88-170

ExoLens bracket adaptor for	Order-Nr.
Victory SF	52 83 60-9901
Victory HT	52 83 60-9902
Victory Harpia	52 83 62-9901
Conquest 32/42 HD	52 83 60-9903
Conquest 56 HD	52 83 60-9904
Conquest Gavia	52 83 61-9901
Terra ED	52 83 60-9905
Diascope Vario-Okular 15-56x/20-75x	52 83 60-9906
Diascope Vario Okular 20-60x/15-45x	52 83 60-9907



ExoLens bracket adaptor for Conquest Gavia





# Cleaning products



## ZEISS Lens Cleaning Kit

Order-Nr.

The complete set for careful, thorough cleaning of the optics – compact in a practical cloth belt pouch: Bellows, dust brush, optics cleaning solution (30 ml), microfibre cloth (18×18 cm) and 10 wet wipes.

2096-685



## ZEISS cleaning spray

Order-Nr.

Specially developed for the cleaning of sensitive optical surfaces – gentle and residue-free. 2 × 60 ml optics cleaning solution including matching microfibre cloth (18 × 18 cm).

2096-686



## ZEISS cleaning cloth

Order-Nr.

Ideal for outdoor use: the cleaning set comprising of a soft microfibre cloth (18×18 cm) and 20 wet wipes.

2096-687



## ZEISS microfibre cloth

Order-Nr.

Maximum cleaning performance: extra-large cleaning cloth (30×40 cm) for the efficient and streak-free cleaning of optical surfaces.

2096-818

Become a part of the **ZEISS Birding Community**

Follow us on the web:

 [facebook.com/ZEISSBirding](https://facebook.com/ZEISSBirding)

 [zeiss.com/nature](https://zeiss.com/nature)

 [youtube.com/user/zeissnature](https://youtube.com/user/zeissnature)

 [#passionforbirding](https://twitter.com/#passionforbirding)

### **Customer Service**

Carl Zeiss Sports Optics GmbH – Customer Service  
Gloelstraße 3-5, 35576 Wetzlar, Germany  
Phone +49 64 41 4 67 61 | Fax +49 64 41 4 83 69  
[service.sportsoptics@zeiss.com](mailto:service.sportsoptics@zeiss.com)

### **Carl Zeiss Sports Optics GmbH**

ZEISS Group  
Consumer Optics  
Business Group  
Gloelstraße 3-5  
35576 Wetzlar, Germany

[www.zeiss.com/sports-optics](https://www.zeiss.com/sports-optics)

